


EXPO SCREEN

OUTDOOR

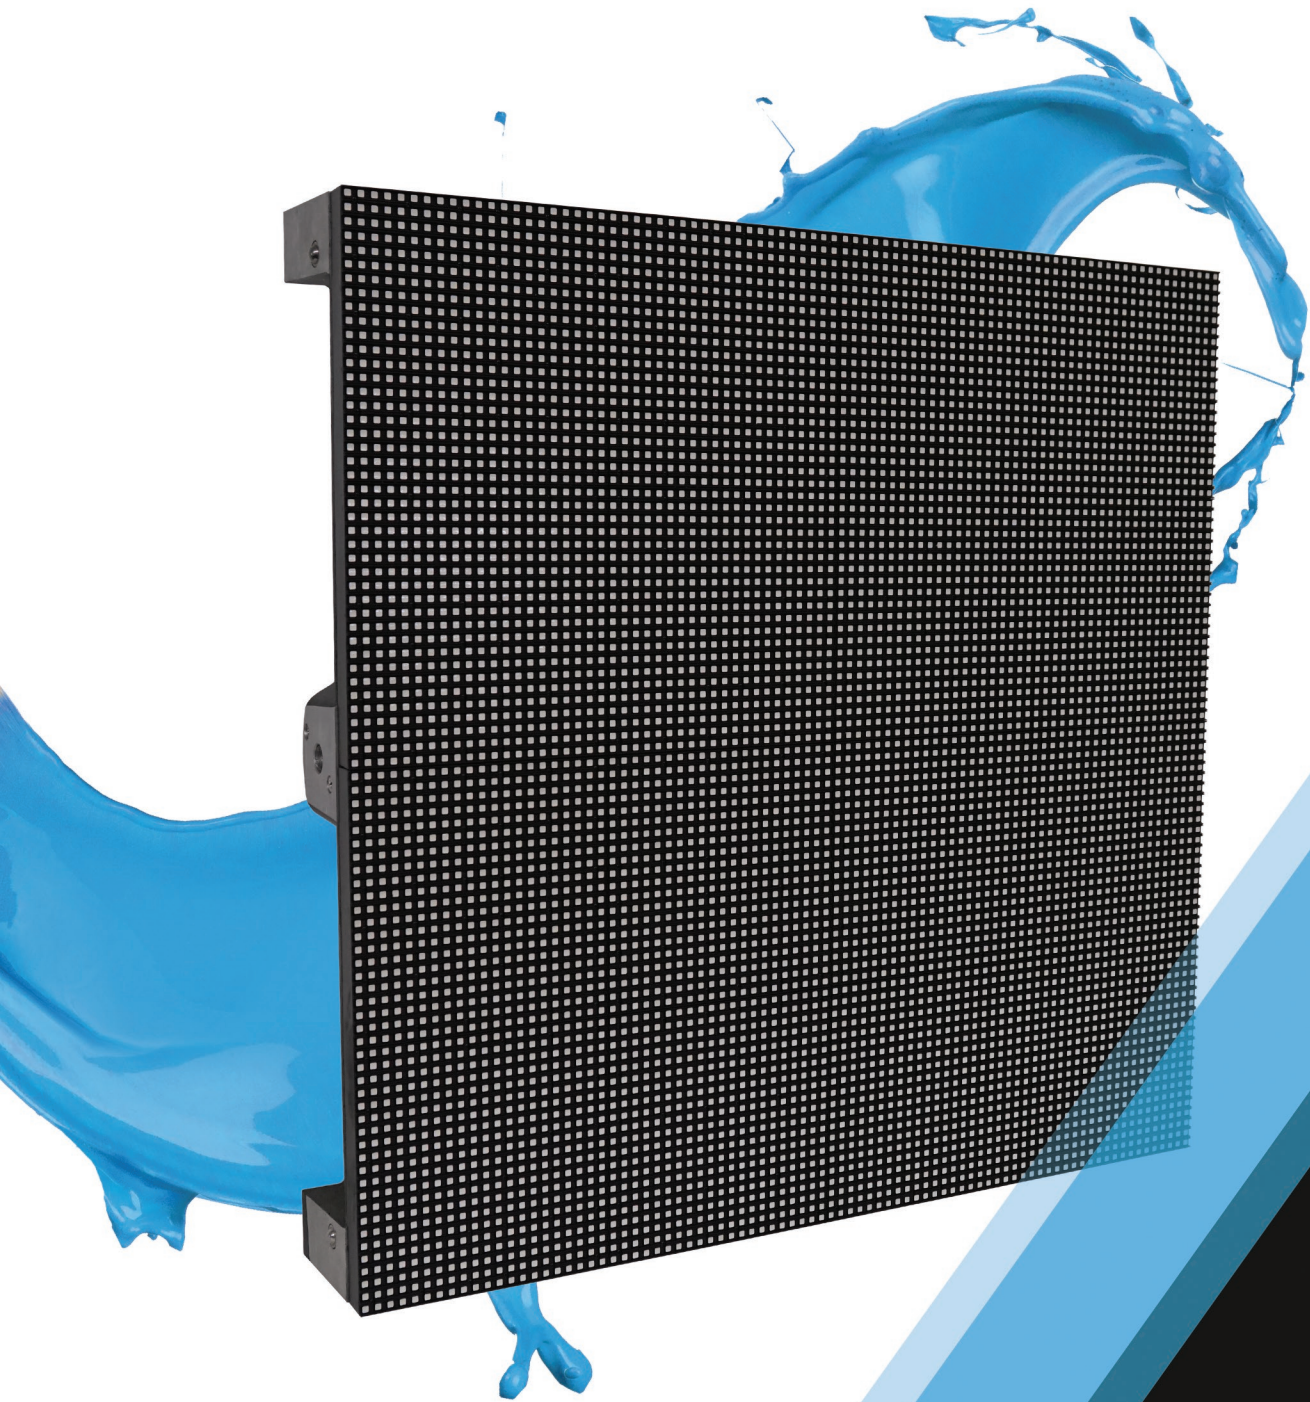


LEDs
REFLEXION

www.reflexionleds.com

MAIN STRENGTHS


 Novastar operating system

 Several dimensions available

 High brightness

 Outdoor display

 Fast cabinet assembly

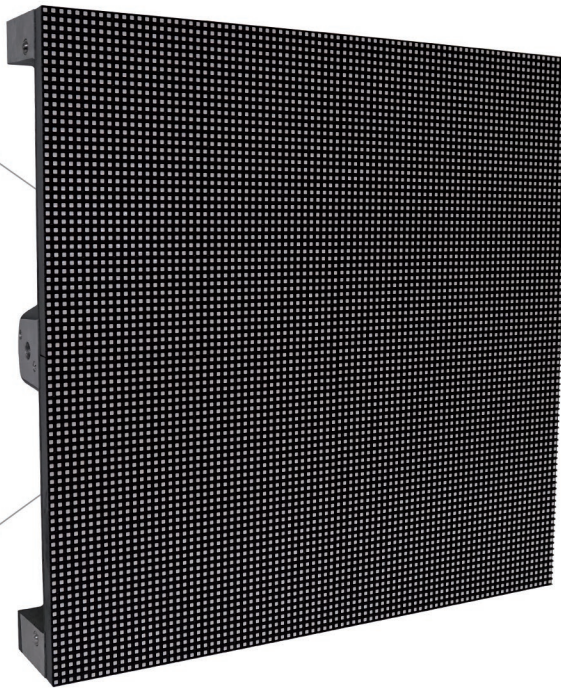

SPECIFICATIONS

CABINET DIMENSIONS	500 x 500 x 85 mm
PITCH (H X V)	5.95 mm
RESOLUTION (H X V)	84 x 84
LED TYPE	SMD
BRIGHTNESS	5500 cd/m ²
VIEWING ANGLE	H : 140°/V : 140°
REFRESH RATE	1920 Hz
INPUT	RJ45
MEDIA MANAGEMENT	Novastar Receiving Card
MEDIA TYPE	Text, Logo, Video
POWER CONSUMPTION	Aver. 200 W/m ²
POWER DATA	AC 100-240 V, 50/60 Hz
WATERPROOF LEVEL	IP 40
OPERATING TEMPERATURE	-20°/+50°
MATERIAL	Aluminium
WEIGHT	10 kg
FRAME COLOR	Black