


GLASS SCREEN

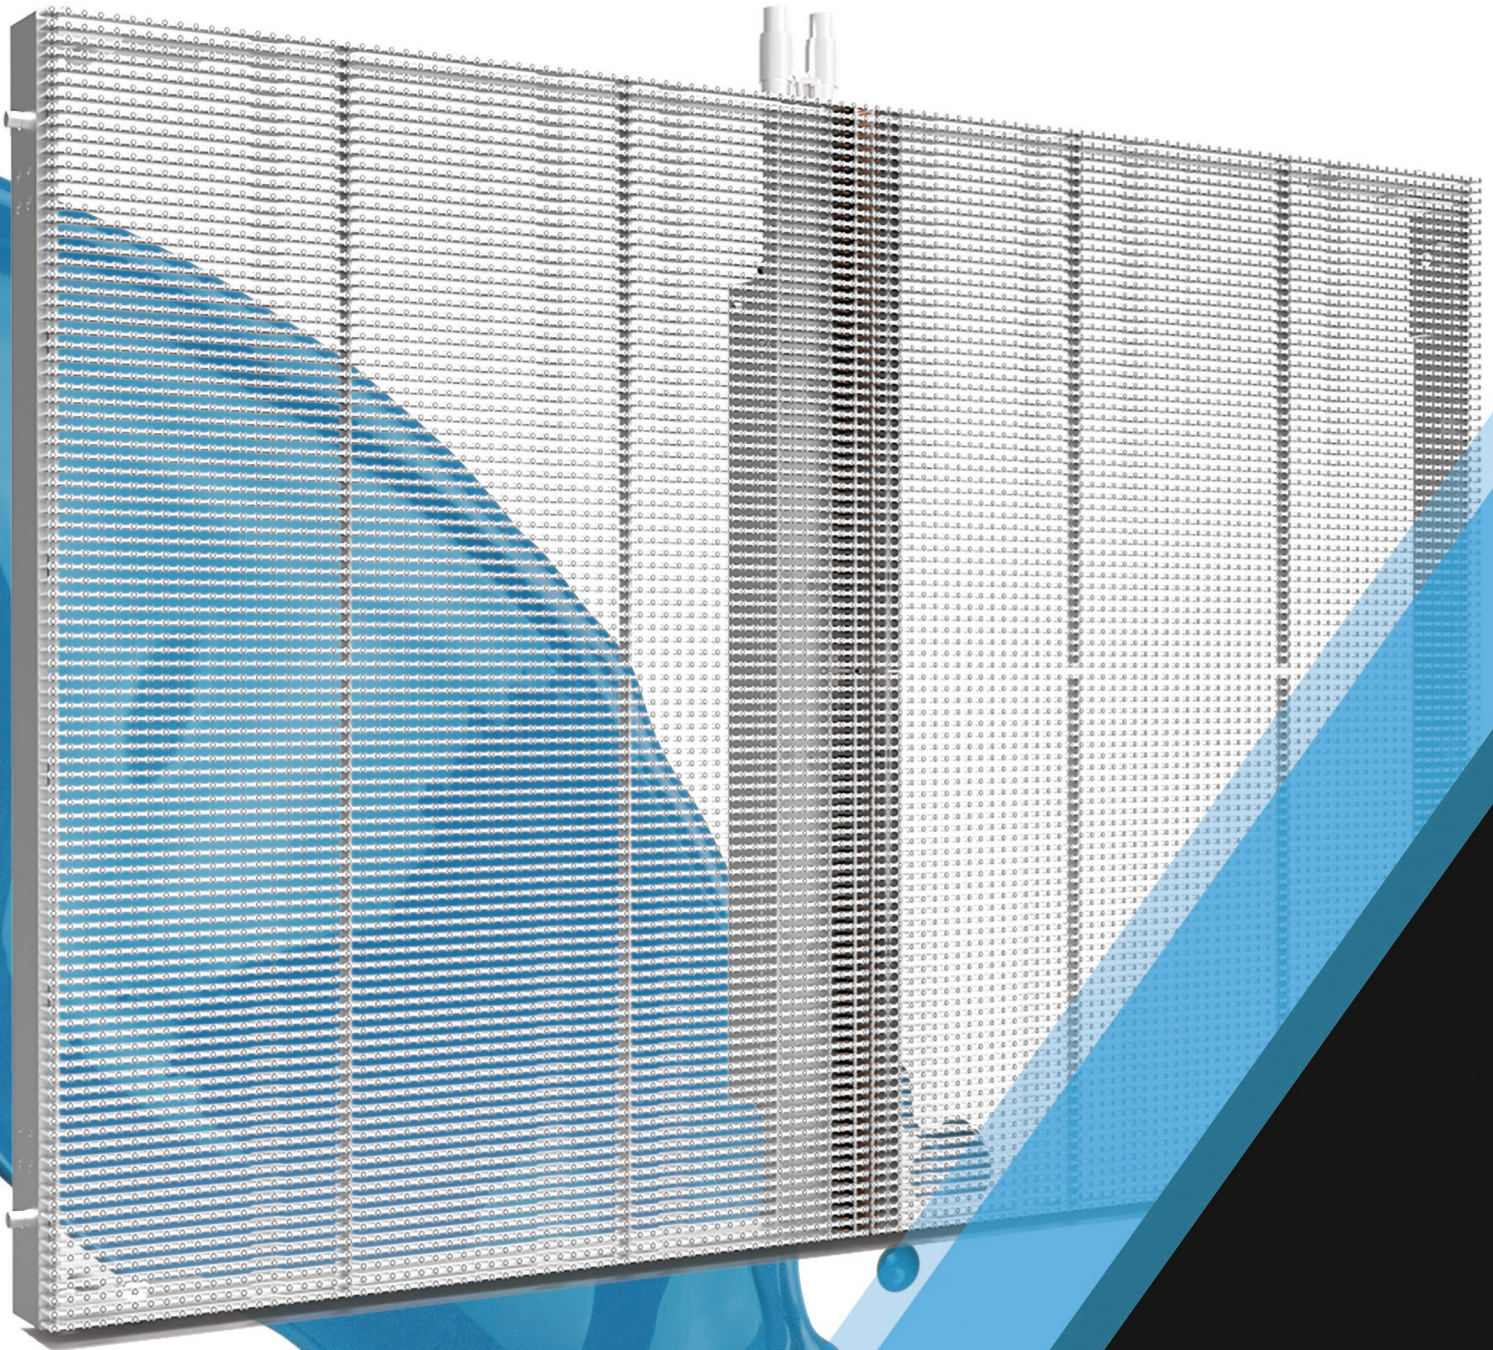

LEDs
REFLEXION

www.reflexionleds.com

MAIN STRENGTHS

Transparency > 70%


Elegant design

Standard Novastar Protocole

Hanging or on base

High brightness

Easy mounting / dismantling

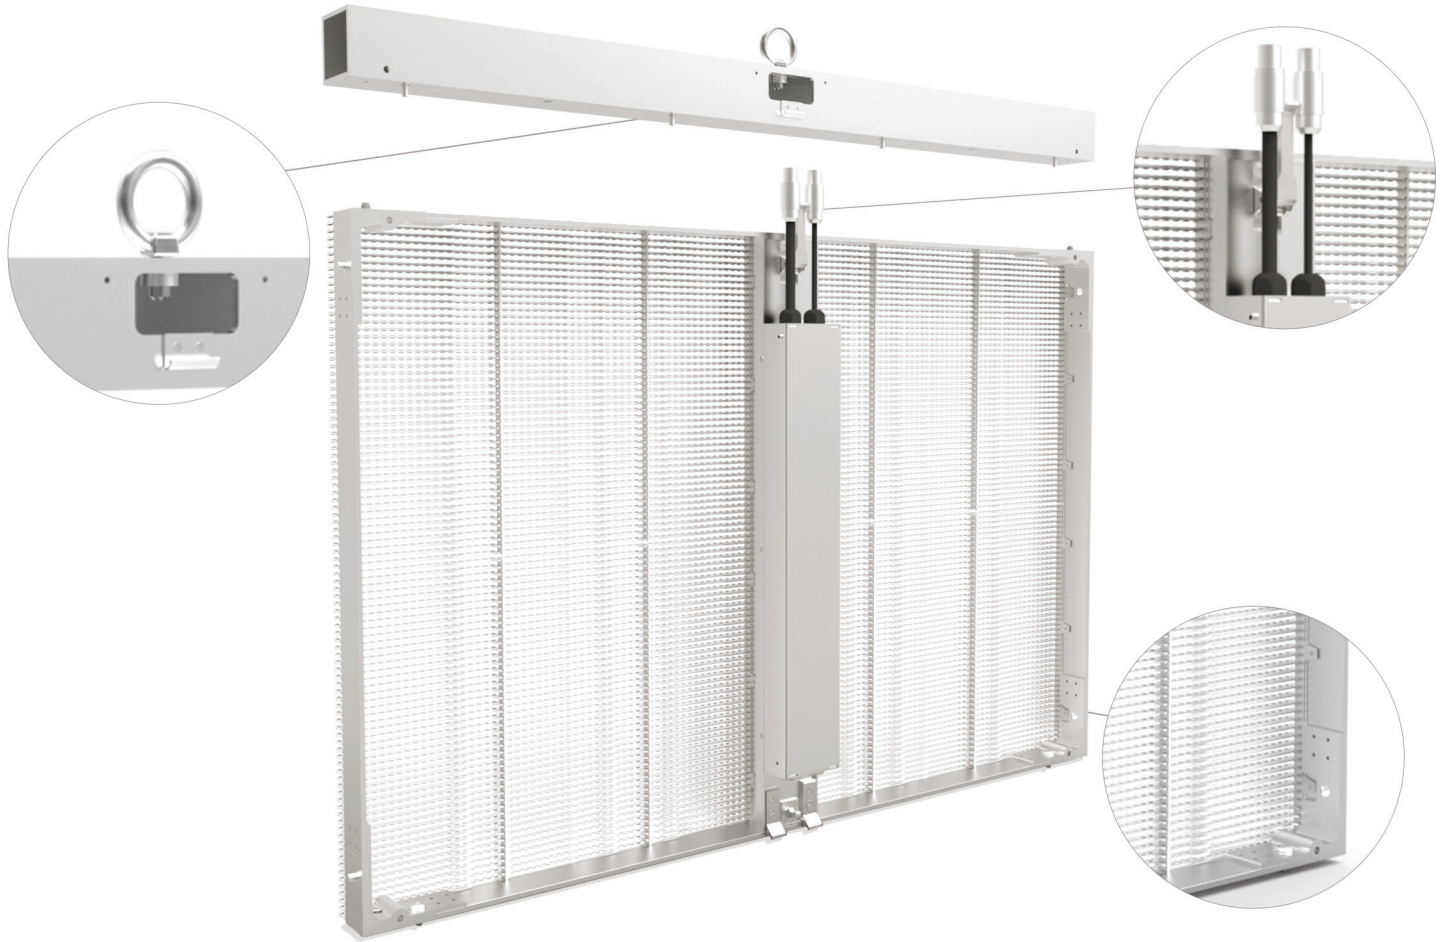

SPECIFICATIONS				
MODELS	GS-5	GS-7.5	GS-10	GS-20
CABINET DIMENSIONS	960 x 640 x 110 mm			
PITCH (H X V)	5 x 6.66 mm	7.5 x 8 mm	10 x 10 mm	20 x 20 mm
RESOLUTION (H X V)	192 x 96	128 x 80	96 x 64	48 x 32
LED TYPE	SMD			
BRIGHTNESS	5500 cd/m ²			
VIEWING ANGLE	H : 140°/V : 100°			
REFRESH ANGLE	1920 Hz			
INPUT	RJ45			
MEDIA MANAGEMENT	Receiving Card Novastar			
MEDIA TYPE	Photo, Video			
POWER CONSUMPTION	Aver. 240 W/m ²	Aver. 220 W/m ²	Aver. 200 W/m ²	Aver. 180 W/m ²
POWER DATA	AC 220-240 V, 50/60 Hz			
WATERPROOF LEVEL	IP 20			
OPERATING TEMPERATURE	0°/+40°			
MATERIAL	Aluminium, Plexiglass			
WEIGHT	10 kg	9 kg	8 kg	6.5 kg
FRAME COLOR	Grey			
OPTIONS				
ACCESSORIES	Flight-case (5 modules/flight), Video player kit (sending box + splitter)			